

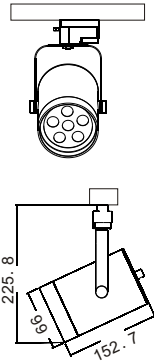
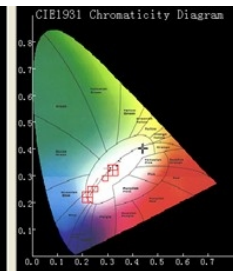
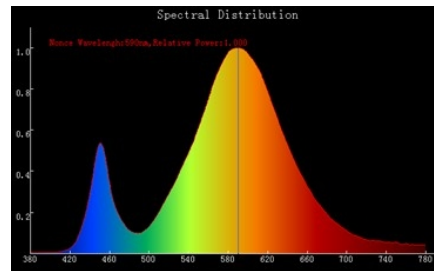


LED Track Light 1012







Input voltage: 24VAC/DC 100-240VAC 50/60Hz
Output Current: 350-700mA
Light source: LED
Power: /6×3W
Color: WW/CW/Y/R/B/G
Beam Angle: 35°45°60°for Cree 15°30°45°60°for EDISON
Operation Temperature: -20°-+50°
Fixture Material: Aluminium
Life Span: 50000Hours 3-PIN
Fitting adjustable angle: Level 350°, vertical 90°
Packing: 1pc/white box;24pcs/carton white Size:110*110*275mm
Carton Size:355*465*580mm N.W:29.04KG G.W:30.5KG

Reliable technical data

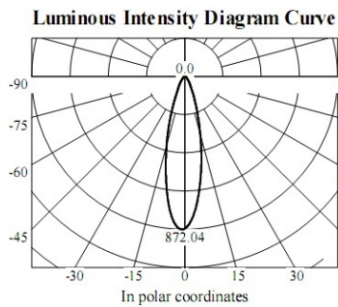


CCT	Beam Angle	Lumens	Avr Intensity	Equivalent Flux
3000K	30	381. 2lm	696. 68cd	315. 0lm

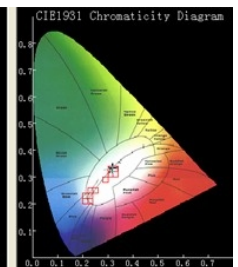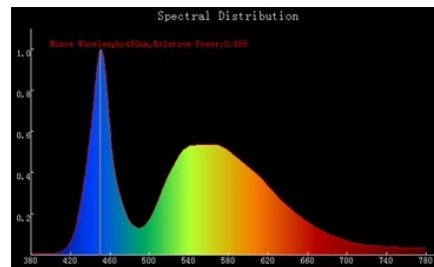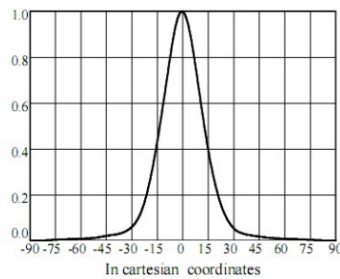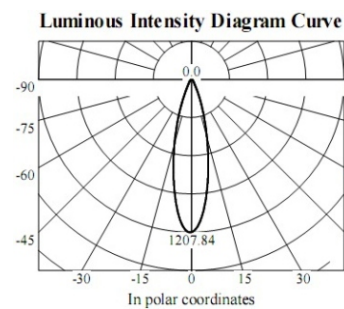


CCT	Beam Angle	Lumens	Avr Intensity	Equivalent Flux
6000K	30	403. 1lm	965. 77cd	379. 5lm

Lumens data depends on LED brand, beam angle
All information is subject to our final confirmation

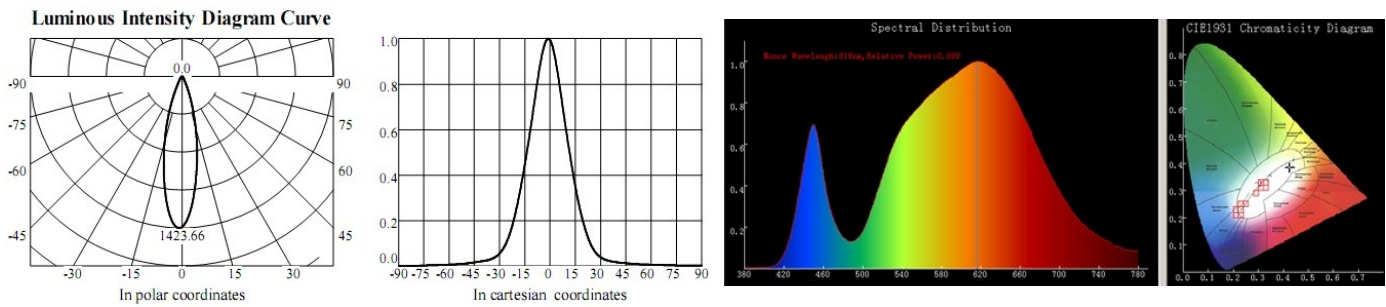

6*3W-EDISON-WW


CCT	Beam Angle	Lumens	Avr Intensity	Equivalent Flux
3000K	30	583. 6lm	1129. 03cd	411. 4lm

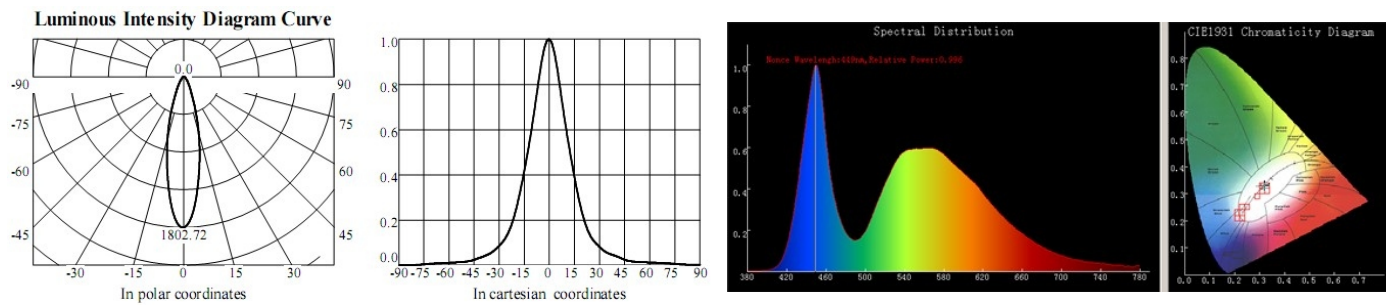

6*3W-EDISON-W

CCT	Beam Angle	Lumens	Avr Intensity	Equivalent Flux
6000K	30	659. 3lm	1419. 58cd	615. 8lm

Packaging drawing

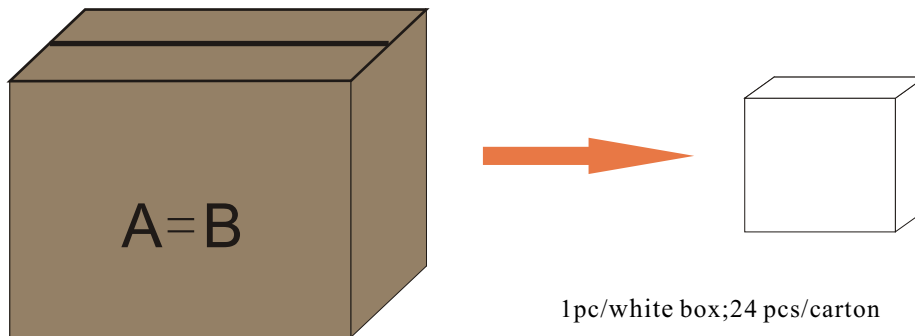

Lumens data depends on LED brand, beam angle
All information is subject to our final confirmation