


PRODUCT SPECIFICATION

***Product Name : 5060 SMD RGB Flexible LED strip(300LED/Roll)**

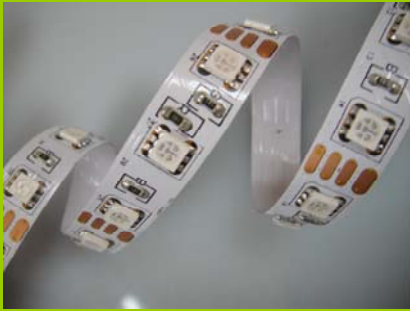


ATTENTION
OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
DISCHARGE
SENSITIVE
DEVICES

*Character

- SIZE:500mm*12 mm *2.5mm
- LED Qty:30 PCS LED
- Input :DC12V /600mA
- Waterproof : \
- Package: 10PCS / Reel

*Circuit & Dimension(Unit: mm)

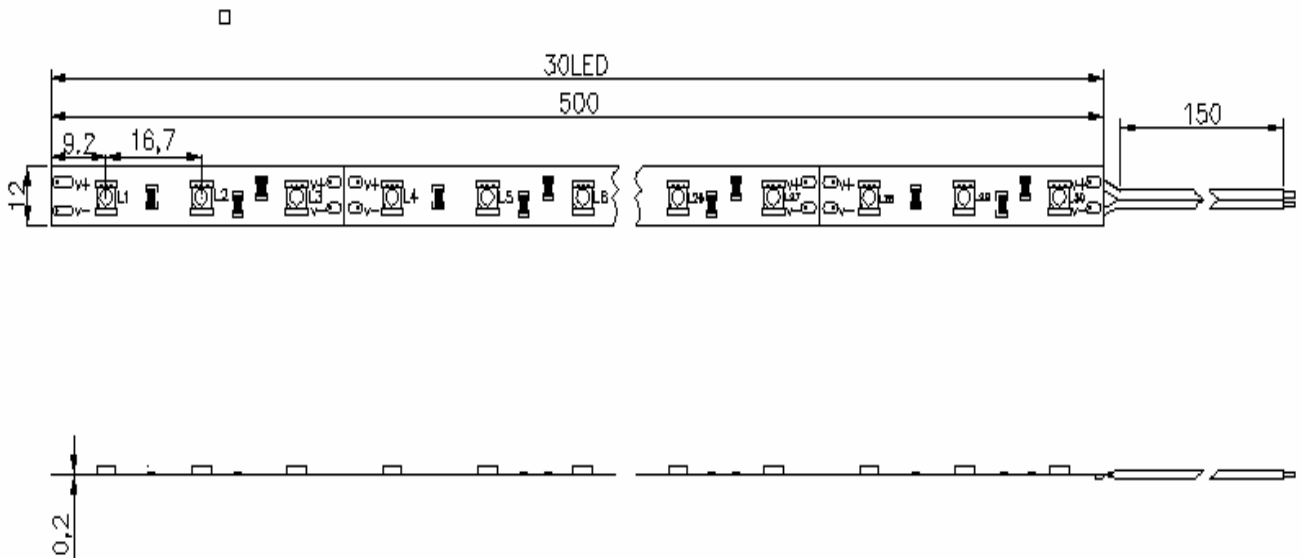

PRODUCT SPECIFICATION

*Electrical / Optical Characteristics (at TA=25°C)

	LED QTY	View Angle	Work Voltage	Work Current	Power	Wave Length	Luminous Flux
	30PCS	120	DC12V	600mA	7.2W	620-625nm	40LM
				600mA	7.2W	515-520nm	90LM
				600mA	7.2W	465-470nm	30LM

Notes: Tolerance of measurement of luminous intensity±15

*Operating Environment


Item	Range	Unit
Forward Current	IF600	m A
Operating Voltage	85-265	VAC
Electrostatic Discharge	>1500	V
Operating Temperature	-25 ~ +60	°C
Storage Temperature	-40 ~ +80	°C

PRODUCT SPECIFICATION

*Applications:

- 1). Architectural decorative lighting
- 2). Indoor Decoration
- 3). Auditorium walkway lighting
- 4). Stairway lighting & Decoration
- 5). Border/contour lighting
- 6). Channel letter lighting
- 7). Emergency & Security lighting
- 8). Cove lighting
- 9). Shop-window decoration.

*Package :

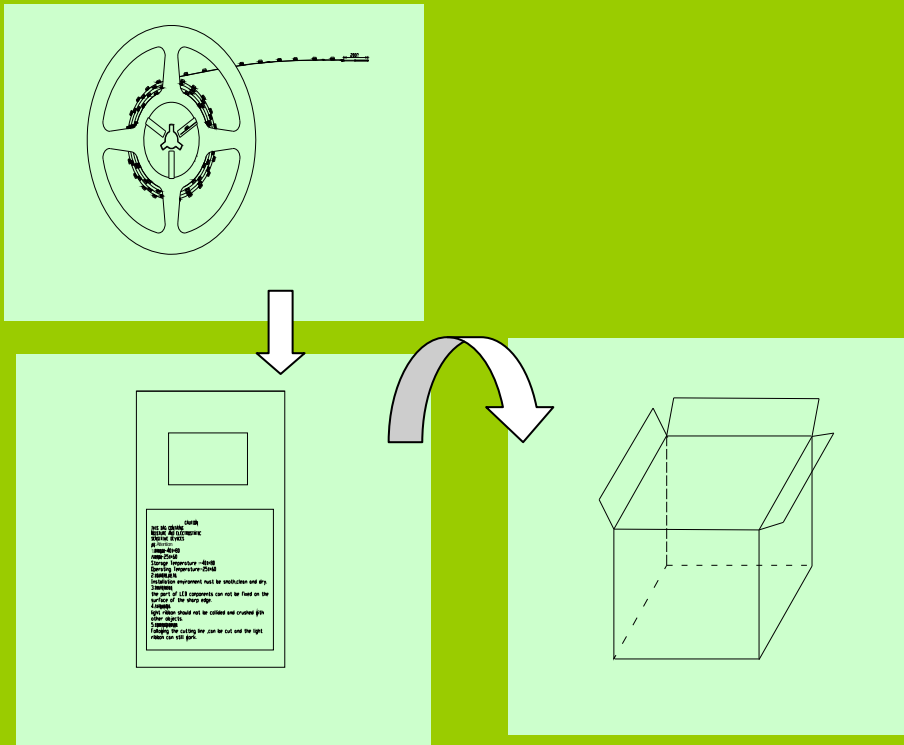

Remark:

1. Carton Size : 260 *240 *200 CM (L*W*H)
2. Carton Qty : 10pcs /reel, 15 reel / carton
3. Net weight : 10.78Kg / Carton
4. Gross Weight : 10.94Kg / Carton
5. The packing specification can be customs-made according to customer's requirement