



## Hochwertige LED-Einrahmung Schienenprojektor

| Model No. | Power | Control method             | Input Voltage | LED brand | Beam angle | Adapter   | Lumen ( ±200lm) | Dimension (mm) |
|-----------|-------|----------------------------|---------------|-----------|------------|-----------|-----------------|----------------|
| TP112W    | 12W   | Osram non-Dim<br>interated | AC220V-240V   | Citizen   | 40°        | Osram     | 350             | D60 * H190     |
| TP112WD   | 12W   | Dali integrated            | AC220V-240V   | Citizen   | 40°        | Powergear | 350             | D60 * H190     |
| TP120W    | 20W   | Osram non-Dim<br>Interated | AC220V-240V   | Citizen   | 40°        | Osram     | 550             | D85 * H208     |
| TP120WD   | 20W   | Dali integrated            | AC220V-240V   | Citizen   | 40°        | Powergear | 550             | D85 * H208     |
| TP130W    | 30W   | Osram non-Dim<br>Interated | AC220V-240V   | Citizen   | 3°-24 °    | Osram     | 1200            | D90 * H285     |
| TP130WD   | 30W   | Dali integrated            | AC220V-240V   | Citizen   | 3°-24°     | Powergear | 1200            | D90 * H285     |

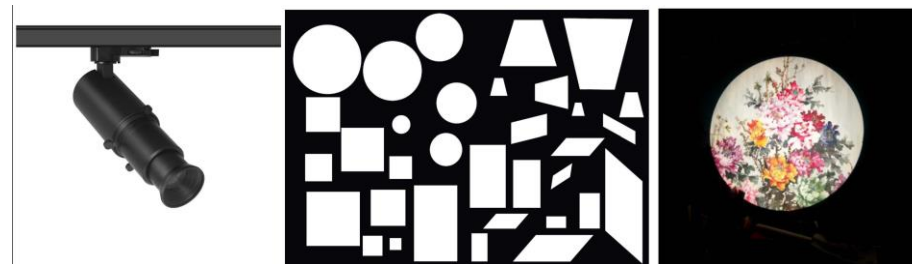

Der Projektor hat vier verstellbare Konturenscheiben für unterschiedliche Framing Größen oder Formen.

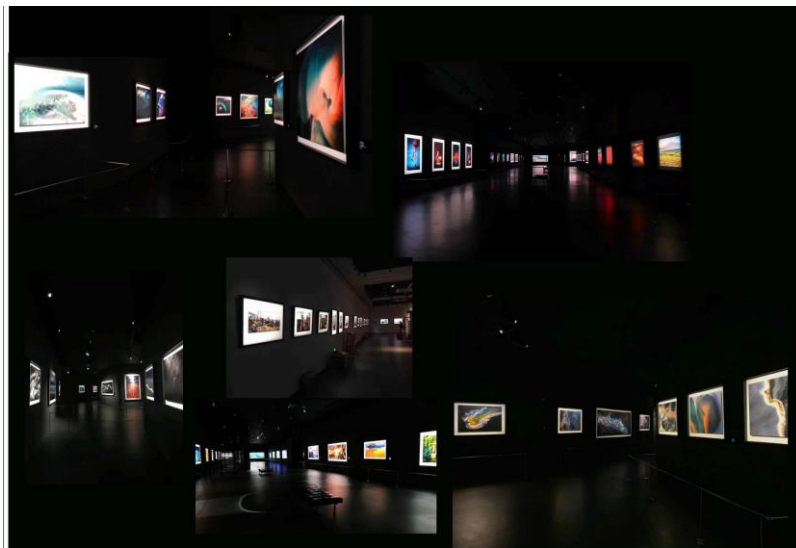

TP112W/TP112WD



TP120W/TP120WD



TP130W/TP130WD\*)

CCT & CRI für alle Einrahmungen Projektor: 2700K/3000K/4000K; CRI > 92

Alle Leuchten sind geeignet für 3 Phasen Schienen.

Alle Dali Dimmer für 6 Kabel - Einstellung nur Helligkeit.  
Optional für TP130W/TP130WD\*) Lichtfarbwechsel möglich.

Technische Änderungen und Anpassungen vorbehalten.

3 Jahre Garantie.